


Universal 60W Micro Driver Power Supply

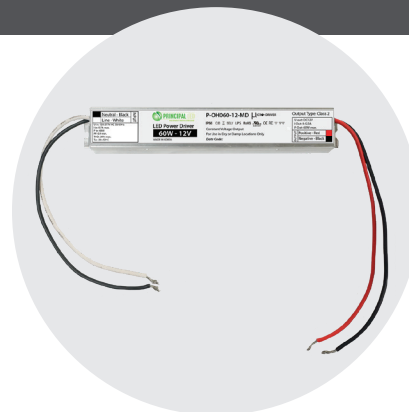

PART

Part Number
P-OH060-12-MD

FEATURES

- Universal input voltage 100 ~ 277 VAC
- Aluminum shell, silicone potted
- 100% full load burn-in tested
- Dry or Damp Locations Rated

PERFORMANCE

Input Voltage	100~277 VAC
Input Current	0.7A max.
Input Frequency	50/60 Hz
Power Factor	0.9 min.
Output Voltage	DC12V
Output Current	0-5.0A
Output Power	60W Max.

SAFETY

Over Current Protection	110~120%
Short Circuit Protection	Hiccup mode, auto recover
Other Protection	Over Voltage/Over Load/Short Circuit
UL	UL879 / UL8750 CSA C22.2 NO. 207-M89
CE-LVD	EN61347-1:2008+A1:2011+A2:2013 EN61347-2-13:2014

PHYSICAL

Length	6.8 in. (174.8 mm)
Width	1.1 in. (27.5 mm)
Height	0.8 in. (20.2 mm)
Mounting Length	6.9 in. (175.26 mm)
Weight	0.37 lbs. (170 grams)
Lead Lengths	7.9 in (177.8 mm)

ENVIRONMENTAL


CE-EMC	EN55015, EN61527, EN61000
FCC	FCC 47 CFR PART 15, CLASS B
IP Rating	IP66
Operating Temperature	-30°C to 50°C (-22°F to 122°F)
Storage Temperature	-40°C to 80°C (-40°F to 176°F)
Relative Humidity	10-90% RH

ORDERING GUIDE

P	O	H	060	12	MD
Power Supplies	Outdoor, Direct-wire	100-277 VAC	Max. 60W	12VDC Output	Principal LED Micro Driver



DIMENSIONS (INCHES):

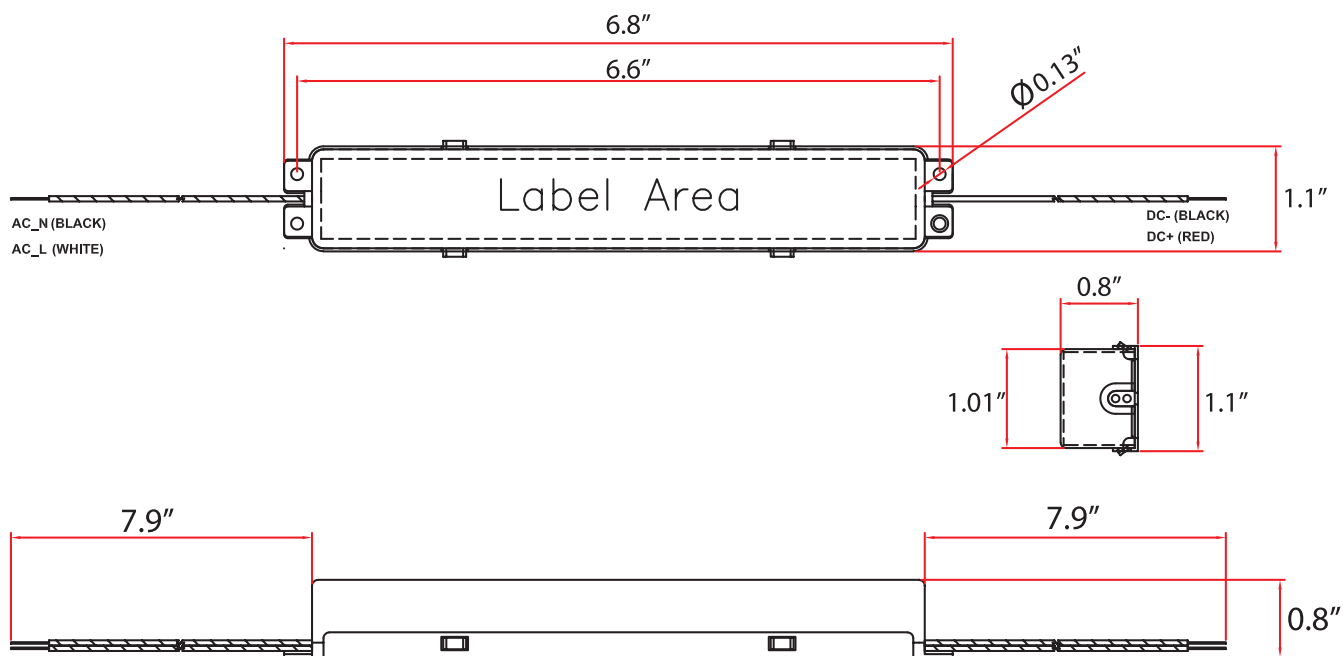

www.p-led.com

(325) 227-4577

3490 Venture Drive, San Angelo, Texas 76905

info@p-led.com