


PINNACLE HE STIK™ 24V



SPECIFICATIONS

Beam Angle	170° Diamondback Optic Lens				
Certifications	UL & cUL Recognized (SAM Manual), CE, RoHs				
Dimensions	.69"W x .75"H x Length (next)				
Efficacy	172 LM/W				
CCT	6500				
Mounting Options	Socket (retro) / Brackets (new)				
Input	24V				
Operating Temp	-40° to +60°C				
Wire Color	+ White & - Gray				
Power	See Product Options				
Packaging	<table border="0"> <tr> <td>Single-Sided</td> <td>24 pieces per tube</td> </tr> <tr> <td>Double-Sided</td> <td>16 pieces per tube</td> </tr> </table>	Single-Sided	24 pieces per tube	Double-Sided	16 pieces per tube
Single-Sided	24 pieces per tube				
Double-Sided	16 pieces per tube				

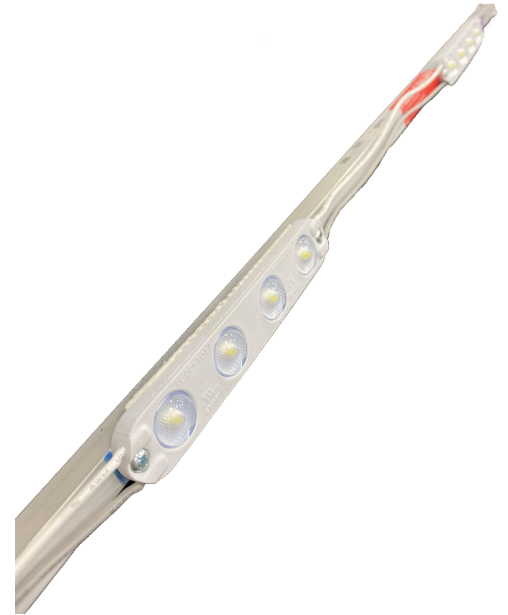

RECOMMENDED COVERAGE CHART


Depth	Max Stroke	Row Spacing
	Single Row	Multi-Row O.C. Spacing
5"-12"	18"	12"

Product and depth may vary depending on face material and desired brightness.

Note: Product is compatible with the Versa Stik

PINNACLE HE 24V MODULE

CCT	CRI	SKU	Efficacy	Intensity	UL Part Number
6500K	>80	M-SFT04-65-24	172 LM/W	227 LM/mod (250 LM/ft.)	PL-OP1-TO4-P

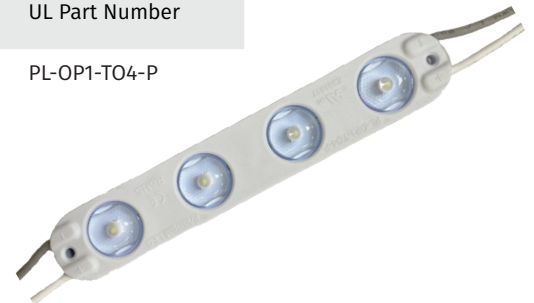



Pinnacle HE 24V Single-Sided

PRODUCT OPTIONS

Length	Nominal Length	No. of Mods	Lumens per Stik	Lumens/ Ft.	Power	Max. Units (96W)	UL Part Number	SKU
18"	15.91	2	454	342	2.64	36.00	PL-OP1-TO4-P/ST-SS-18-SW	B-TP-S02-01865-24-HE
24"	21.91	2	454	249	2.64	36.00	PL-OP1-TO4-P/ST-SS-24-SW	B-TP-S02-02465-24-HE
30"	27.91	3	681	293	3.96	24.00	PL-OP1-TO4-P/ST-SS-30-SW	B-TP-S03-03065-24-HE
36"	33.91	3	681	241	3.96	24.00	PL-OP1-TO4-P/ST-SS-36-SW	B-TP-S03-03665-24-HE
42"	39.91	4	908	273	5.28	18.00	PL-OP1-TO4-P/ST-SS-42-SW	B-TP-S04-04265-24-HE
48"	45.91	4	908	237	5.28	18.00	PL-OP1-TO4-P/ST-SS-48-SW	B-TP-S04-04865-24-HE
60"	57.91	5	1135	235	6.60	14.00	PL-OP1-TO4-P/ST-SS-60-SW	B-TP-S05-06065-24-HE
64"	61.91	6	1362	264	7.92	12.00	PL-OP1-TO4-P/ST-SS-64-SW	B-TP-S06-06465-24-HE
72"	69.91	7	1589	273	9.24	10.00	PL-OP1-TO4-P/ST-SS-72-SW	B-TP-S07-07265-24-HE
84"	81.91	8	1816	266	10.56	9.00	PL-OP1-TO4-P/ST-SS-84-SW	B-TP-S08-08465-24-HE
96"	93.91	9	2043	261	11.88	8.00	PL-OP1-TO4-P/ST-SS-96-SW	B-TP-S09-09665-24-HE
108"	105.91	10	2270	257	13.20	7.00	PL-OP1-TO4-P/ST-SS-108-SW	B-TP-S10-10865-24-HE
117"	114.91	11	2497	261	14.52	6.00	PL-OP1-TO4-P/ST-SS-117-SW	B-TP-S11-11765-24-HE
120"	117.91	12	2724	277	15.84	6.00	PL-OP1-TO4-P/ST-SS-120-SW	B-TP-S12-12065-24-HE

Pinnacle HE 24V Double-Sided

PRODUCT OPTIONS

Length	Nominal Length	No. of Mods	Lumens per Stik	Lumens/ Ft.	Power	Max. Units (96W)	UL Part Number	SKU
18"	15.91	4	908	685	5.28	18.00	PL-OP1-TO4-P/ST-DS-18-SW	B-TP-D04-01865-24-HE
24"	21.91	4	908	497	5.28	18.00	PL-OP1-TO4-P/ST-DS-24-SW	B-TP-D04-02465-24-HE
30"	27.91	6	1362	586	7.92	12.00	PL-OP1-TO4-P/ST-DS-30-SW	B-TP-D06-03065-24-HE
36"	33.91	6	1362	482	7.92	12.00	PL-OP1-TO4-P/ST-DS-36-SW	B-TP-D06-03665-24-HE
42"	39.91	8	1816	546	10.56	9.00	PL-OP1-TO4-P/ST-DS-42-SW	B-TP-D08-04265-24-HE
48"	45.91	8	1816	475	10.56	9.00	PL-OP1-TO4-P/ST-DS-48-SW	B-TP-D08-04865-24-HE
60"	57.91	10	2270	470	13.20	7.00	PL-OP1-TO4-P/ST-DS-60-SW	B-TP-D10-06065-24-HE
64"	61.91	12	2724	528	15.84	6.00	PL-OP1-TO4-P/ST-DS-64-SW	B-TP-D12-06465-24-HE
72"	69.91	14	3178	546	18.48	5.00	PL-OP1-TO4-P/ST-DS-72-SW	B-TP-D14-07265-24-HE
84"	81.91	16	3632	532	21.12	4.00	PL-OP1-TO4-P/ST-DS-84-SW	B-TP-D16-08465-24-HE
96"	93.91	18	4086	522	23.76	4.00	PL-OP1-TO4-P/ST-DS-96-SW	B-TP-D18-09665-24-HE
108"	105.91	20	4540	514	26.40	3.00	PL-OP1-TO4-P/ST-DS-108-SW	B-TP-D20-10865-24-HE
117"	114.91	22	4994	522	29.04	3.00	PL-OP1-TO4-P/ST-DS-117-SW	B-TP-D22-11765-24-HE
120"	117.91	24	5448	554	31.68	3.00	PL-OP1-TO4-P/ST-DS-120-SW	B-TP-D24-12065-24-HE