


COPPERHEAD PRO MAX

Print size : 36 x 34 cm / 14" x 13.5"



Standard Features:

- ▶ **Front Screen Loading**
- ▶ **Side screen holder**
- ▶ Micro-Registration system similar to M&R Presses
- ▶ **Squeegee Equaliser system**
- ▶ Carrousel Rotation-Both Clockwise & Anti-clockwise
- ▶ Individual Off Contact
- ▶ Pre-defined Print Head and Flash Position.
- ▶ Built-In Electrical Connection for Flash Cure
- ▶ Mechanical Head Lifting for easy screen cleaning
- ▶ Digital touchscreen control panel
- ▶ Tool-free quick release pallet locks
- ▶ Independent print/flood speed controls
- ▶ Tool-free Squeegee/Floodbar angle adjustments
- ▶ On-board Self Diagnostics

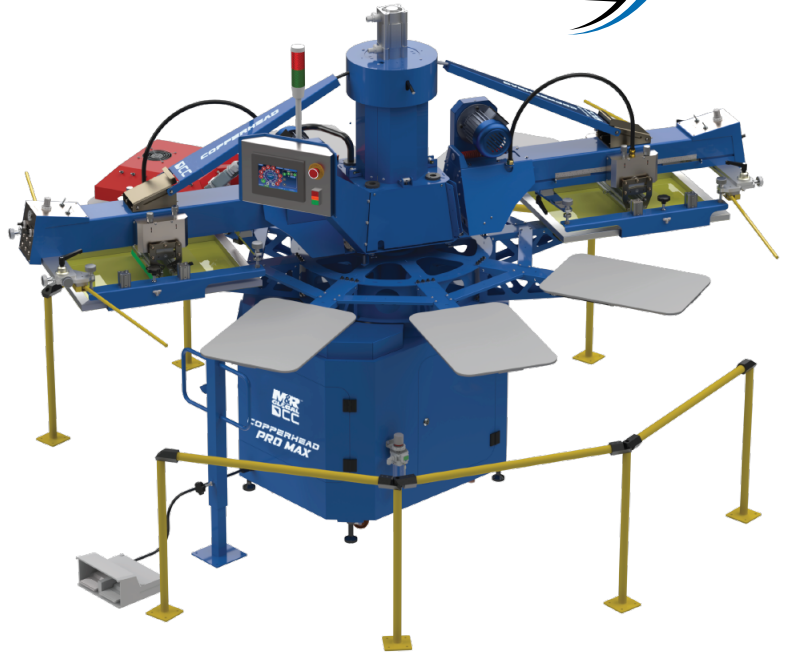

FIRST FULLY LOADED MACHINE *This is it!*

What's included?

- ▶ 1 Set of 43.9 Solid Aluminium Pallet w/Rubber up to (15 x 22" / 38 x 56 cm)
- ▶ 1 Set of Squeegee holder with squeegee rubber up to (15" / 38 cm)
- ▶ 1 Set of Floodbar up to (15" / 38 cm)
- ▶ 1 No. In-head Flash Curing Unit
- ▶ Index & Skip Foot Pedal
- ▶ Optical No Shirt Sensor with stand
- ▶ Pneumatic Frame Locks
- ▶ Front Micro Registration
- ▶ Multi Print Mode Program
- ▶ Print Stack Mode
- ▶ Print-Start / Print-Finish mode
- ▶ Front to Back/Back to Front- Squeegee Mode
- ▶ Laser Registration Guide
- ▶ Squeegee Pressure Regulator
- ▶ Caster Wheels
- ▶ Toolkit
- ▶ Maintenance/Hardware Kit

Note:

- This product has certificate available.
- Install charges only include labor cost. All other costs like food, travel, airfare, visa charges & miscellaneous costs are at actual.

Specifications

PRO MAX 8/3/1F	
Air @ 7 Bar (102 psi) ¹	175 L/min (6.2 cfm)
Electrical Requirements ²	208-230 V, 3 ph, 43.5A, 50/60 Hz, 8.5 kW (UL) 380-415 V, 3 ph, 43.2A, 50 Hz, 8.5 kW (CE)
Maximum In-built Flash Cure Units	3
Diameter	290 cm (114")
Maximum Frame Size	51 x 69 cm (20" x 27") OD
Maximum Image Area	36 x 34 cm (14" x 13.5")
Machine Weight	326 kg (719 lb)
Standard Pallet Size	38 x 56 cm (15" x 22")
Stations/Colors/In-built Flash	8/3/1F
¹ Consumption @ 10 pieces/min; 7 bar input pressure & max image area ² Use uninterruptible power supply (UPS) to safeguard machine from voltage fluctuation out of main supply. If incoming voltage differs from the voltage(s) listed in the brochure, calculate amperage accordingly. Contact DCC / your nearest dealer for total amperage in case of using additional In-head flash units.	

Crate Details

MACHINE NAME	BOX NO.	DESCRIPTION	CRATE DIMENSIONS (LXWXH)	QTY (IN NOS.)	GROSS WEIGHT
Copperhead Pro Max 8 Station/2 Color/1 Flash	1	Main Body	42 x 39 x 80 (in) 107 x 99 x 203 (cm)	1.00	1122 (lb) 510 (kg)
	2	Printhead, Frame, Flash	58 x 27 x 25 (in) 147 x 69 x 64 (cm)	1.00	280 (lb) 127 (kg)
	3	Printhead, Frame	51 x 27 x 25 (in) 130 x 69 x 64 (cm)	1.00*	242 (lb) 110 (kg)
	4	Pallets & Pallet Arm	33 x 28 x 25 (in) 84 x 71 x 64 (cm)	1.00	231 (lb) 105 (kg)
	5	Display & Toolkit Material	45 x 20 x 22 (in) 114 x 51 x 56 (cm)	1.00	150 (lb) 68 (kg)
Copperhead Pro Max 8 Station/3 Color/1 Flash	1	Main Body	57 x 47 x 93 (in) 145 x 119 x 236 (cm)	1.00	1892 (lb) 860 (kg)
	2	Printhead	58 x 24 x 25 (in) 147 x 61 x 64 (cm)	1.00*	242 (lb) 110 (kg)
	3	Pallets & Pallet Arm	44 x 27 x 29 (in) 112 x 69 x 74 (cm)	1.00	242 (lb) 110 (kg)
	4	Display & Toolkit Material	45 x 20 x 22 (in) 114 x 51 x 56 (cm)	1.00	150 (lb) 68 (kg)