


TAP OUT MOD™

M-SFTO3-XX

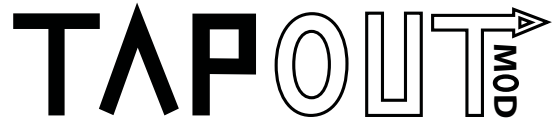

TAP OUT MODULE OPTIONS

CCT / WAVELENGTH	SKU	Efficacy	Intensity	UL Part Number
5000K	M-SFTO3-50	95 LM/W	125 LM/mod (275 LM/ft.)	PL-OP2-TO3-P-NW
7000K	M-SFTO3-70	105 LM/W	139 LM/mod (305 LM/ft.)	PL-OP2-TO3-P-TW



SPECIFICATIONS

Beam Angle	160° Low Dome, Batwing Optic	Packaging	Per Bag	90 Mods (41ft.)
Certifications	UL & cUL Recognized (SAM Manual), CE, RoHs		Per Case	900 Mods (409ft.)
Dimensions	0.72"W x 3.15"L x 0.3"H	Bag Color	Green	7000K
Mounting Options	Peel & Stick, Mechanical Screw Hole		Grey	5000K
Input	12V	Power*		1.32 Mods (2.9ft.)
Operating Temp	-40° to +60°C	Max Mods per Power Supply		45
Wire Color	+ White Solid & - White/Black Stripe	Power Supply		PLED 12V
Max Mods in Series	22 Mods (10ft.)	Mods per Foot		2.2
		Module on Center Spacing		5.45"

RECOMMENDED COVERAGE CHART

Depth	Max Stroke	Row Spacing
	Single Row	Multi-Row O.C. Spacing
6"	14"	12"
7"	16"	16"
8"	16"	16"
9-12"	18"	18"

Note: Product and depth may vary depending on face material and desired brightness.

