

Vivid S 270 Version Shown

VIVID WAVE RGB

Table of Contents

Specifications	2-4	Testing	11-15
Technical Specifications	2	Photometric Data	11
Physical Specifications	3	Certifications	12
Part Number Naming	4	Fixture Testing	12
Connectors	5-9	Charts	13-15
Seamless	5		
Submersible Seamless	6		
Barrel	7		
Mounting Hardware	8-9		
Standard	8		
Plastic	8		
Spring Clip	9		
Plastic & Aluminum	10		
Flexible	10		
Packaging	11		

Technical Specifications

Light Dimension 0.63 x 0.67in (16x17mm)

Output		RGB	
LED Light	Epistar SMD LED Chip	Nichia SMD LED Chip	
Max Run Length			
Single Feed	Full Load: 22.97ft (7m)	Dynamic Load: 32.81ft (10m)	
Light Surface	Square profile 160°		
Lumen Maintenance	70,000 Hours L70 @ 25°C : 90,000 L50 @ 25°C 50,000 Hours L70 @ 50°C : 70,000 Hours L50 @ 50°C		
Electrical			
Input Voltage	24V DC		
Power Consumption	3.66W/ft (12W/m)		
Physical			
LED Count	25 LEDs/ft (84 LEDs/m)	22 LEDs/ft (72 LEDs/m)	
LED Spacing	0.47in (11.9mm)	0.55in (13.89mm)	
Cutting Unit Length	3.28in (83.3mm) (7 LEDs)		
Thermal Management	Free air convection		
Fixture Connections	End,side & bottom lead wires		
Minimum Bend Diameter	11.81in (300mm) (Top Bending)		
Temperature Ranges			
Installation	32°F to 140°F (0°C to 60°C)		
Operating	-13°F to 140°F (-25°C to 60°C)		
Humidity	0-95% non condensing		
Dependability			
Warranty	Limited 5 Year		
Safety			
Certification	Tested to UL & CSA by Underwriters Laboratory for use in USA and Canada, complies with California Title 24 Requirements, Lighting Facts. Exceeds ANSI C78.377A, CE & RoHS Compliant.		
IP Rating	IP68 with appropriately rated accessories		

Technical Specifications

Color Information

Color	CCT Wavelength
Red	620-630nm
Green	520-530nm
Blue	465-475nm
R+G+B (W)	N/A

Lumen Count

Color	Per Foot	Per Meter	Power
Red	>24.38lm	>80lm	/
Green	>57.91lm	>190lm	/
Blue	>9.14lm	>30lm	/
R+G+B (W)	>91.44lm	>300lm	3.66W/ft (12W/m)


*Color Jackets:

For standard or custom color jacket options, contact your Account Manager. Min. order quantity of 656ft (200m).


Physical Specifications





Light Profile

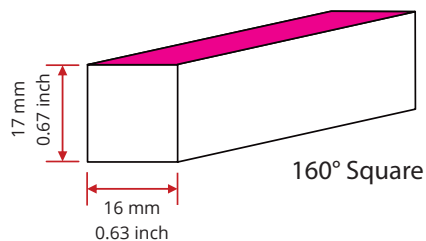

Bending Direction

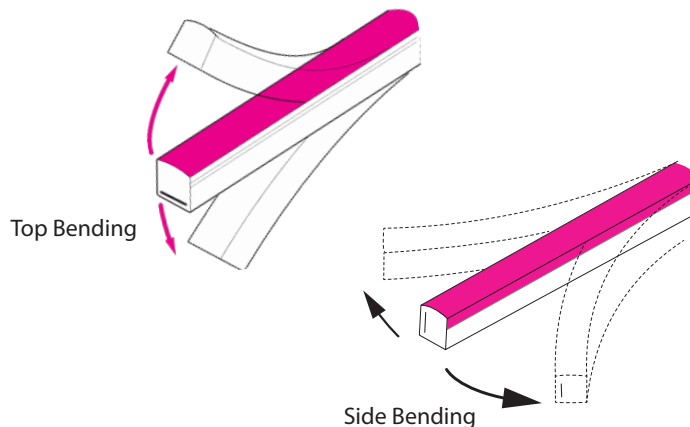


Minimum Bending Diameter

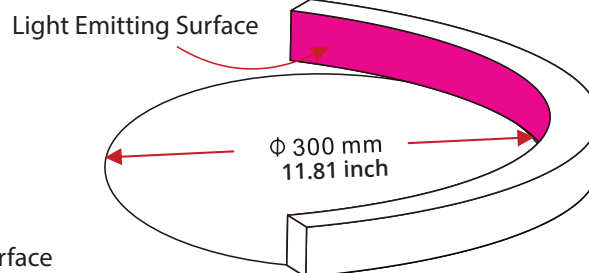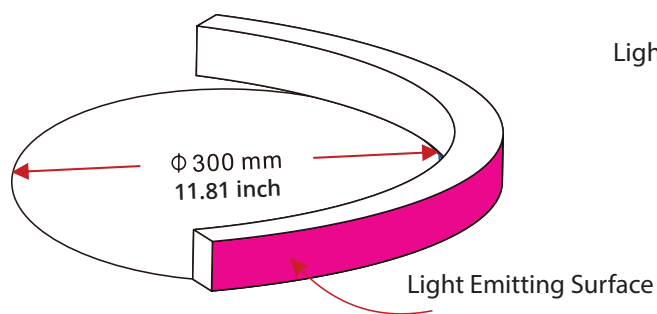

Part Number Naming Convention

NF-16E-0-01-4W-X-XXX-24DV

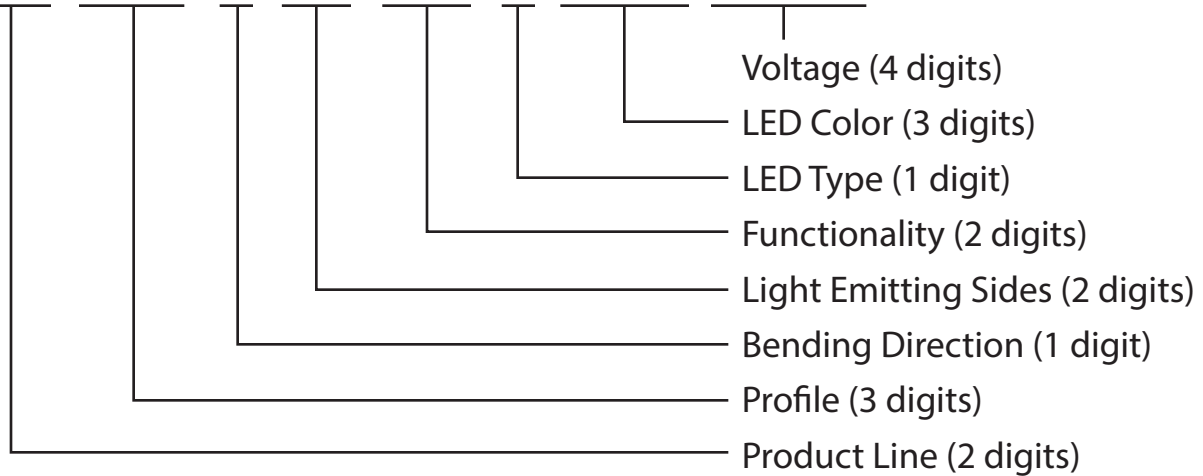


For full part number naming rules, please refer to the document on www.glls.com/support/documentation/

Connectors



Seamless Connectors

IP67: Rated for wet locations, not submersion.
Factory Assembly only.

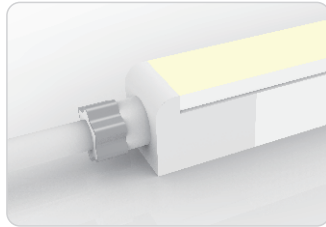


Seamless End Exit

NA-16E-0-00-4W-SE-0-EN-XXX-S

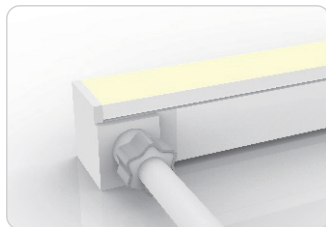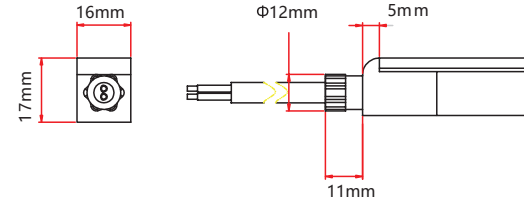


Seamless Side Exit

NA-16E-0-00-4W-SE-1-SL-XXX-S
NA-16E-0-00-4W-SE-2-SL-XXX-S
NA-16E-0-00-4W-SE-1-SR-XXX-S
NA-16E-0-00-4W-SE-2-SR-XXX-S

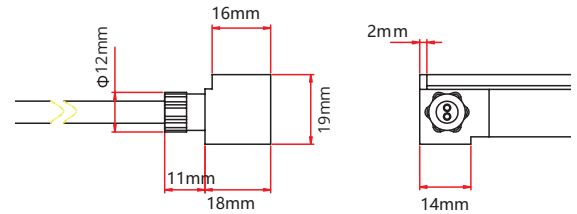



Seamless Bottom Exit

NA-16E-0-00-4W-SE-0-BO-XXX-S

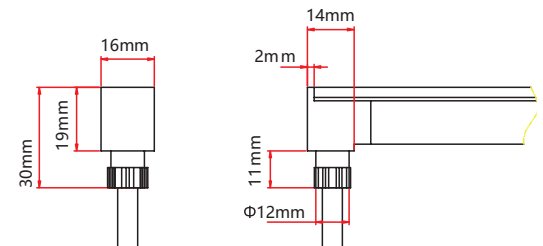


Seamless End Cap

NA-16E-1-00-0W-SE-1-EC-000-P
NA-16E-1-00-0W-SE-2-EC-000-P

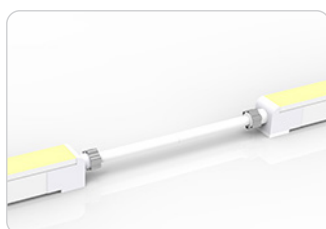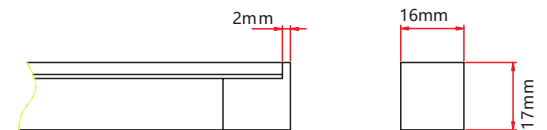

Seamless Jumper


NA-16E-0-00-4W-SE-0-EJ-XXX-S



Connectors



IP68: Submersible. Waiting on 3rd party certification from UL as of 18/04/12. Factory Assembly only.

Submersible Seamless Connectors





Submersible End Exit

NA-16E-0-00-4W-SU-0-EN-XXX-S

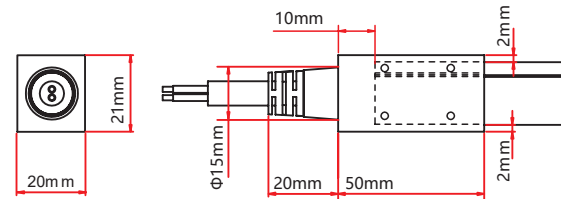



Submersible Side Exit

NA-16E-0-00-4W-SU-1-SL-XXX-S
 NA-16E-0-00-4W-SU-2-SL-XXX-S
 NA-16E-0-00-4W-SU-1-SR-XXX-S
 NA-16E-0-00-4W-SU-2-SR-XXX-S

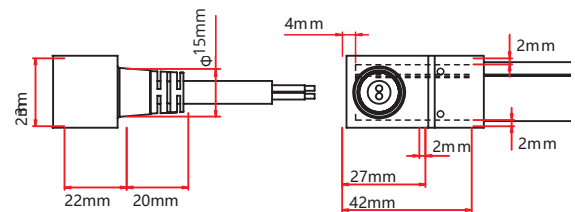



Submersible Bottom Exit

NA-16E-0-00-4W-SU-0-BO-XXX-S

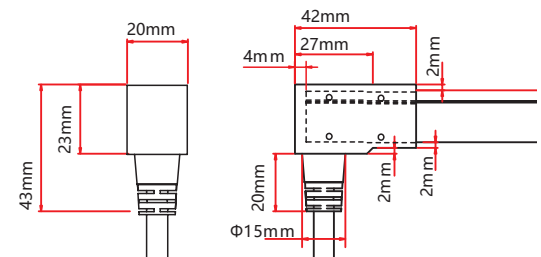


Submersible End Cap

NA-16E-1-00-0W-SU-1-EC-000-P
 NA-16E-1-00-0W-SU-2-EC-000-P

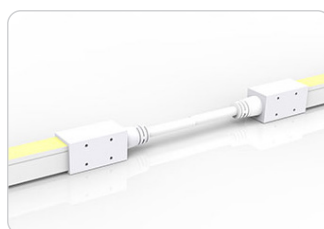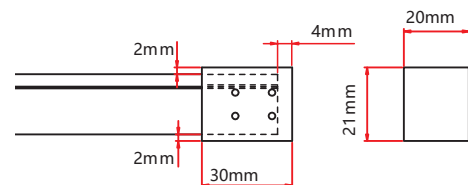

Submersible Jumper

NA-16E-0-00-4W-SU-0-EJ-XXX-S

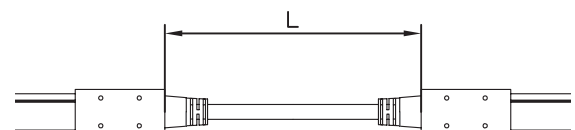

Connectors



IP20: Rated for indoor use only.
Factory Assembly only.

Barrel Connectors




Barrel Connectors

- NA-XX-BC-DC-CXX-F
- NA-XX-BC-DC-CXX-M
- NA-XX-BN-XXA-CXX-F
- NA-XX-BN-XXA-CXX-M
- NA-XX-PL-XXA-CXX-F
- NA-XX-PL-XXA-CXX-M



Anti-Wicking Ferrule

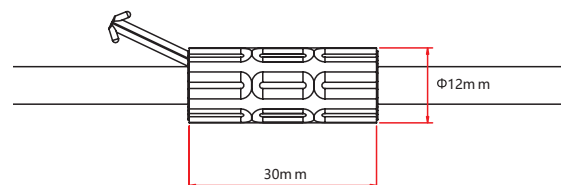



Anvil Cutter

Optional accessory for on-site cutting.

Factory order only


Mounting Hardware

Locking Anodized Aluminum Channel

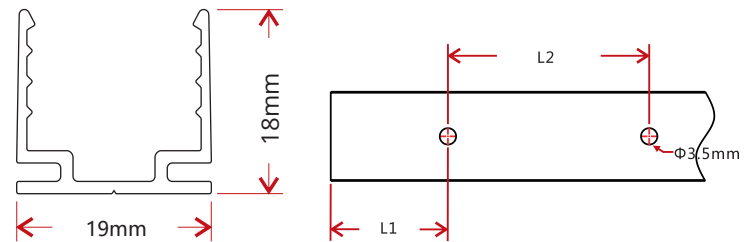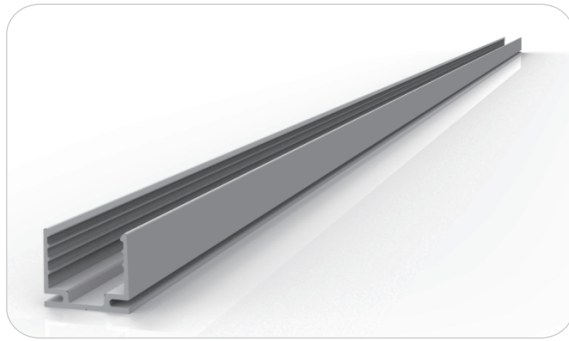

W x H	Standard Length	Part Number	L1	L2	Screw Hole Φ	Hole #
0.75 x 0.71in (19 x 18mm)	1.38in (35mm)	CL-16-R-AL-3C5-SD	0.69in (17.5mm)	/	$\Phi 0.14\text{in}$ (3.5mm)	1
	19.69in (500mm)	CH-16-R-AL-0M5-SD	1.97in (50mm)	7.87in (200mm)	$\Phi 0.14\text{in}$ (3.5mm)	3
	39.37in (1000mm)	CH-16-R-AL-01M-SD	3.94in (100mm)	7.87in (200mm)	$\Phi 0.14\text{in}$ (3.5mm)	5
	78.74in (2000mm)	CH-16-R-AL-02M-SD	3.94in (100mm)	7.87in (200mm)	$\Phi 0.14\text{in}$ (3.5mm)	10



Plastic Channel

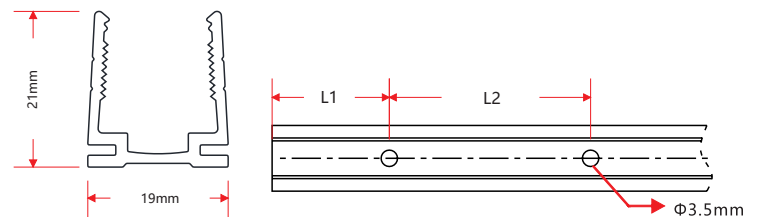

W x H	Standard Length	Part Number	L1	L2	Screw Hole Φ	Hole #
0.75 x 0.83in (19 x 21mm)	19.69in (500mm)	CH-16-R-PL-0M5-SD	1.97in (50mm)	7.87in (200mm)	$\Phi 0.14\text{in}$ (3.5mm)	3
	39.37in (1000mm)	CH-16-R-PL-01M-SD	3.94in (100mm)	7.87in (200mm)	$\Phi 0.14\text{in}$ (3.5mm)	5
	78.74in (2000mm)	CH-16-R-PL-02M-SD	3.94in (100mm)	7.87in (200mm)	$\Phi 0.14\text{in}$ (3.5mm)	10



Mounting Hardware

Spring Clip Anodized Aluminum Channel

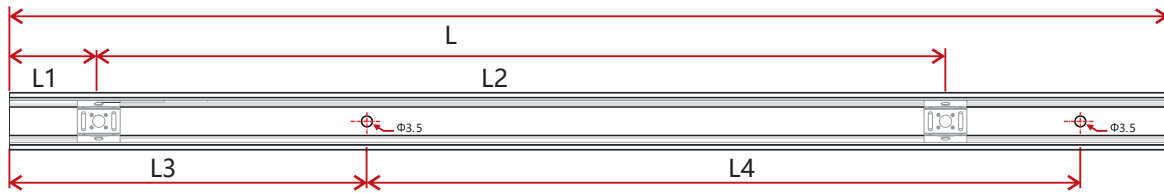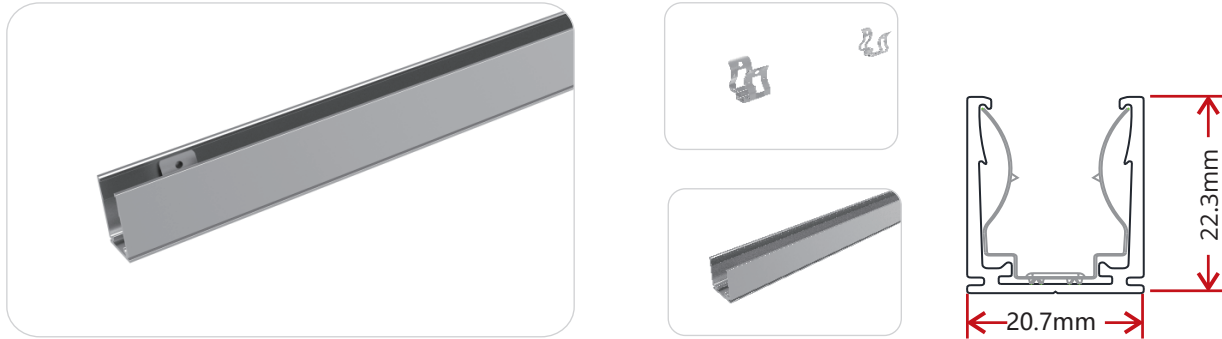

W x H	Standard Length	Part Number	L1	L2	L3	L4	Screw Hole Φ	Hole #	Clip #
0.82 x 0.88in (20.7 x 22.3mm)	1.38in (35mm)	CL-16-R-AL-3C5-SP	0.69in (17.5mm)	/	0.2in (5mm)	0.98in (25mm)	Φ 0.14in (3.5mm)	2	1
	19.69in (500mm)	CH-16-R-AL-0M5-SP	0.98in (25mm)	8.86in (225mm)	1.97in (50mm)	7.87in (200mm)	Φ 0.14in (3.5mm)	3	3
	39.37in (1000mm)	CH-16-R-AL-01M-SP	0.98in (25mm)	9.35in (237.5mm)	3.94in (100mm)	7.87in (200mm)	Φ 0.14in (3.5mm)	5	5
	78.74in (2000mm)	CH-16-R-AL-02M-SP	0.98in (25mm)	9.6in (243.8mm)	3.94in (100mm)	7.87in (200mm)	Φ 0.14in (3.5mm)	10	9





Plastic & Aluminum Channel

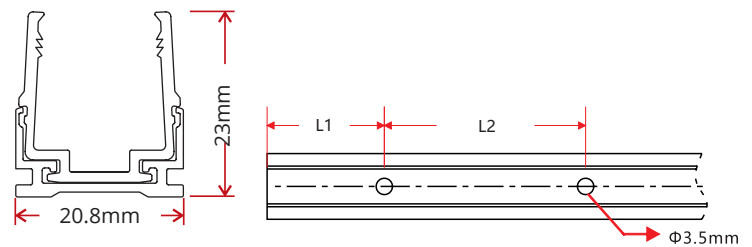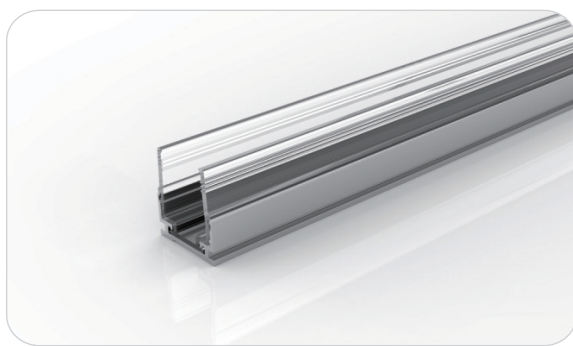

W x H	Standard Length	Part Number	L1	L2	Screw Hole Φ	Hole #
0.82 x 0.91in (20.8x 23mm)	1.38in (35mm)	CL-16-R-AP-3C5-SD	0.69in (17.5mm)	/	Φ 0.14in (3.5mm)	1
	19.69in (500mm)	CH-16-R-AP-0M5-SD	1.97in (50mm)	7.87in (200mm)	Φ 0.14in (3.5mm)	3
	39.37in (1000mm)	CH-16-R-AP-01M-SD	3.94in (100mm)	7.87in (200mm)	Φ 0.14in (3.5mm)	5
	78.74in (2000mm)	CH-16-R-AP-02M-SD	3.94in (100mm)	7.87in (200mm)	Φ 0.14in (3.5mm)	10

Mounting Hardware



Stainless Steel Flexible Channel

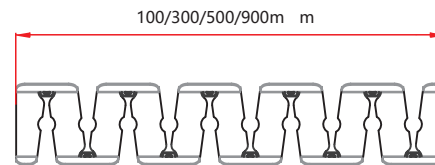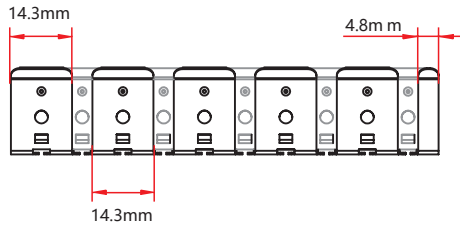

W x H	Standard Length	Part Number
0.69 x 0.79in	3.94in (100mm)	CH-16-F-SS-0M1-SD
(17.5 x 20mm)	11.81in (300mm)	CH-16-F-SS-0M3-SD
	19.69in (500mm)	CH-16-F-SS-0M5-SD
	35.43in (900mm)	CH-16-F-SS-0M9-SD

This profile can be mounted using screws in any gaps where the channel bends.

Packaging

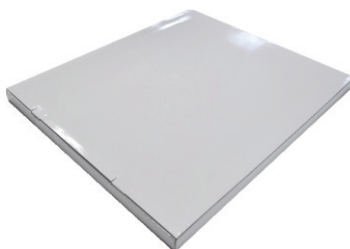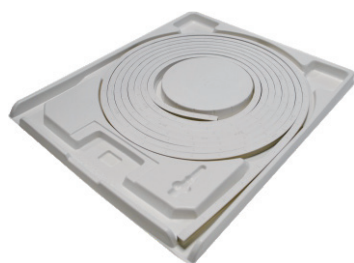

White Box

Packing Box

Fixture Length	White Box Dimensions	Packing Box Dimensions	# Of White Boxes	Package Weight
<14.76ft (<4.5m)	15.35x2.05x19.67in (39x5.2x50cm)	20.47x16.14x11.02in (52x41x28cm)	5	<17.64lbs (<8kg)
16.4 - 26.24ft (5-8m)	20.08x2.05x24.41in (51x5.2x62cm)	25.2x20.87x6.9in (64x53x17.5cm)	3	13.23-19.84lbs (6-9kg)
16.4 - 26.24ft (5-8m)	20.08x2.05x24.41in (51x5.2x62cm)	25.2x20.87x11.02in (64x53x28cm)	5	19.84-30.86lbs (9-14kg)
32.81ft (10m)	23.62x1.46x27.95in (60x3.7x71cm)	28.74x24.41x7.87in (73x62x20cm)	5	37.48lbs (17kg)
65.62ft (20m)	26.77x2.05x31.1in (68x5.2x79cm)	31.9x27.56x4.92in (81x70x12.5cm)	2	24.25lbs (11kg)

Testing

Photometric Data

RGB		
LED Type	SMD	
Beam Angle	160 °	
Color	Wavelength	Lumen/m
Red	620-630nm	>60lm
Green	520-530nm	>225lm
Blue	465-475nm	>33lm
White (R+G+B)	N/A	>318lm

Testing

Certifications

	Testing Organization	Certificate Serial N°	Report Reference
UL 2108	UL	20160726-E360029	E360029-2013
CE-EMC	SGS	SZEM1702001259LMV	SZEM160600421302

Fixture Testing

Optical Testing

Spectrum Analysis	IES LM 79 (Lumen, CCT, CRI, XY, SDCM, wavelength)
Photometric Distribution	IES LM 73 (Lumen intensity distribution & Lux diagram)
Lumen Maintenance & Lifetime	IES LM 84 & IES TM28

Temperature Testing

Normal Temperature Test	UL1598 & UL2388 & IEC60598-1 & IEC60598-2-21
Abnormal Operation Test	UL1598 & UL2388 & IEC60598-1 & IEC60598-2-21

Durability Testing




Bending Test	Manufacturer-defined, 500 cycles
Swing Test	UL2388, >750 cycles
Tensile Test	Manufacturer-defined, > the weight of light in max. connection length double feed
Twist Test	Max connection length double feed Manufacturer-defined, >200 cycles
Ball Impact	UL1598 & UL2388 & IEC60598-1 & IEC60598-2-21
IK07 IK08	IEC62262

Environmental Testing

Chlorinated Water Immersion	BG9667, PH6.8-7.6, free chlorine 0.3-0.6mg/L
Salt Water Immersion	IEC60598-1, Salinity 4%
Salt Spray Test	IEC68-2-11
Outdoor Exposure	Manufacturer-defined
Flame Resistance	UL94
UV Exposure	ASTMG 154, ISO 4892-3, UVA @ 340nm
IPX5, IPX6, IPX7, IPX8	IEC60529
Temperature Shock	Manufacturer-defined, -40°C - 60°C (typical temperature range)
Constant Temperature	Manufacturer-defined

Testing

Charts

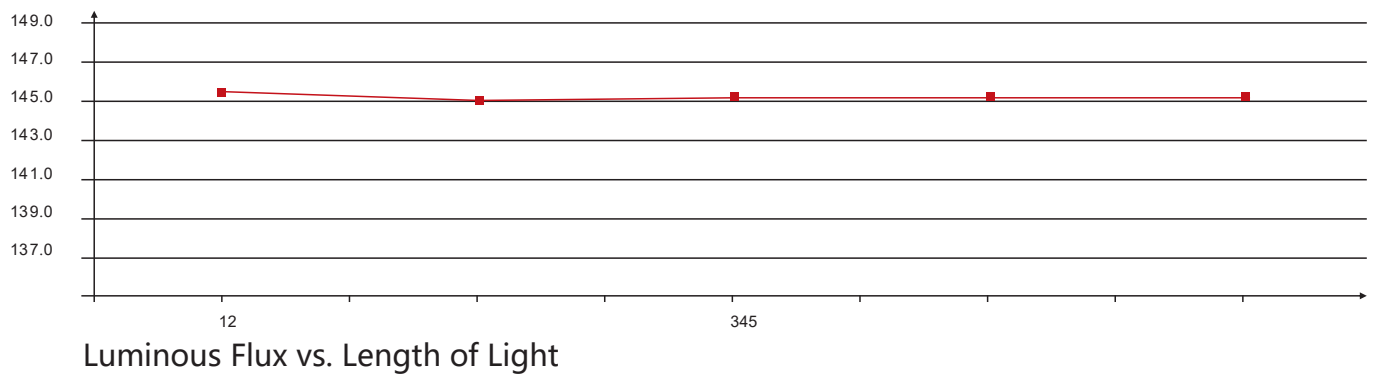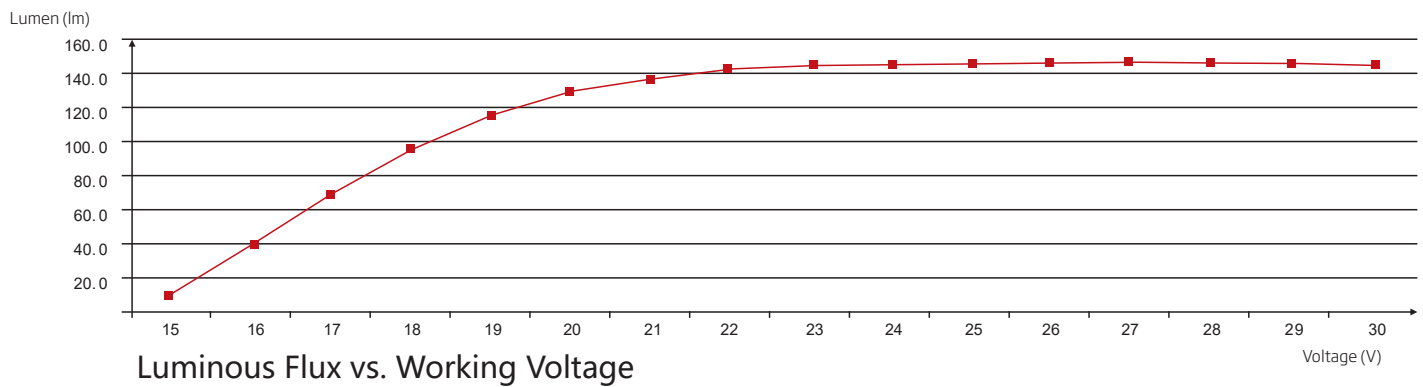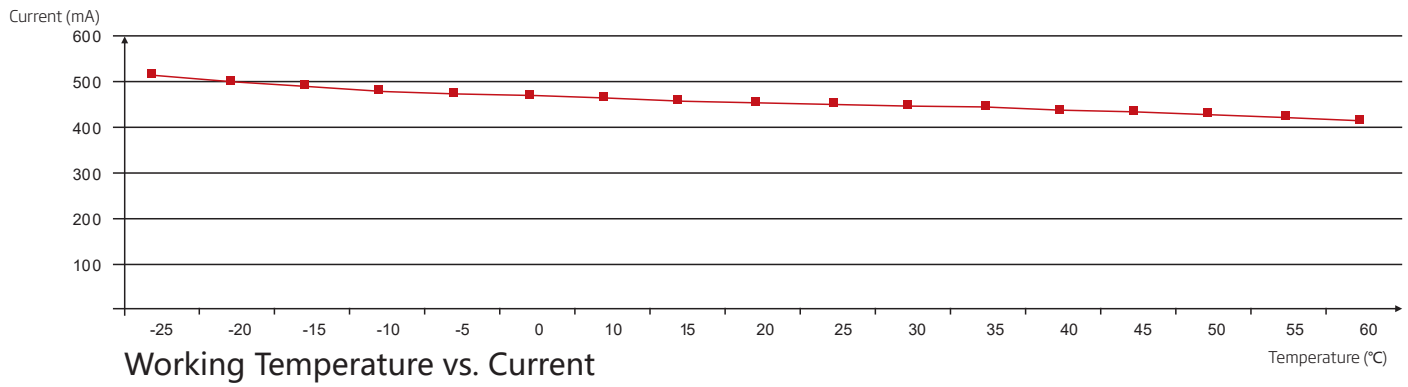

Testing

Charts

ANSI STANDARD


Nominal CCT Categories

Nominal CCT	Target CCT and tolerance(K)	Target D_{uv}	D_{uv} Tolerance Range
2200K	2238 ±102	0.0000	Tx:CCT of the source
2500K	2460±120	0.0000	For Tx<2870K
2700K	2725 ±145	0.0000	0.000±0.0060
3000K	3045±175	0.0001	For Tx≥2870K
3500K	3465±245	0.0005	Duv(Tx)±0.0060
4000K	3985±275	0.0010	where
4500K	4503±243	0.0015	Duv(Tx)=57700 × (1/Tx) ²
5000K	5029±283	0.0020	-44.6 × (1/Tx)
5700K	5667±355	0.0025	+0.00854
6500K	6532±510	0.0031	
Flexible CCT (2200-6500K)	$T_f^{1)} \pm \Delta T^{2)}$	$D_{uv} T_f^{3)}$	

Remark:


- 1) T_f is chosen to be at 100K steps (2300,2400,.....,6400K),excluding the ten nominal CCTs listed in Table 1.
- 2) $\Delta T = 1.1900 \times 10^8 \times T^{-3} - 1.5434 \times 10^6 \times T^{-2} + 0.7168 \times T - 902.55$
- 3) Same as in the D_{uv} Tolerance Range.

(X,Y) Chromaticity Diagram

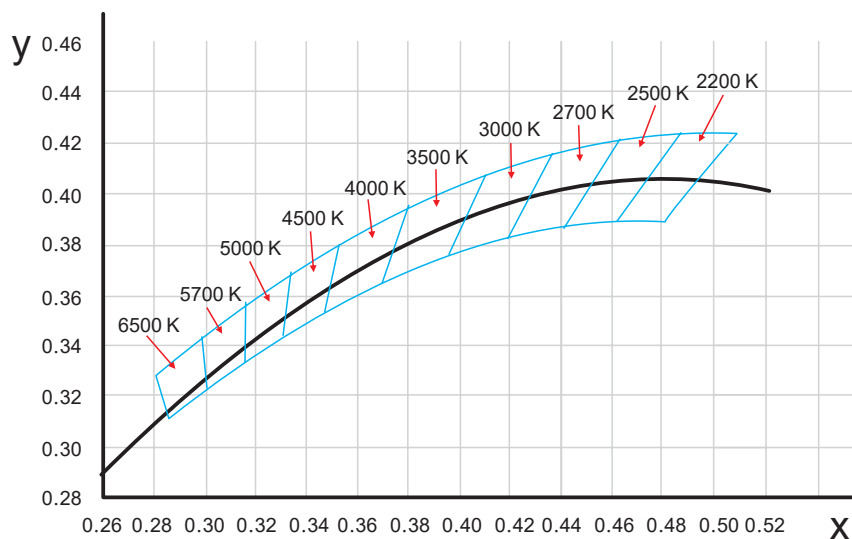

Testing

Charts

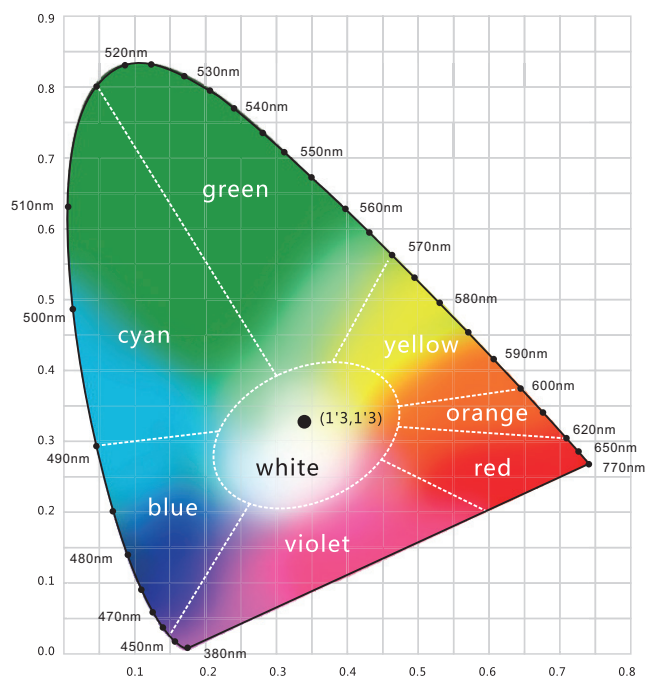



Light Color

 **Red**
620-630nm

 **Green**
520-530nm

 **Blue**
465-475nm

Loading Chart

Rated Power	Power Supply									
	35W	60W	75W	80W	100W	120W	150W	185W	240W	320W
2.19W/ft (7.2W/m)	9.84ft (3m)	19.69ft (6m)	24.61ft (7.5m)	26.25ft (8m)	32.81ft (10m)	39.37ft (12m)	49.21ft (15m)	59.06ft (18m)	78.74ft (24m)	98.43ft (30m)
3.66W/ft (12W/m)	6.56ft (2m)	11.48ft (3.5m)	14.76ft (4.5m)	16.4ft (5m)	19.69ft (6m)	22.97ft (7m)	32.81ft (10m)	39.37ft (12m)	45.93ft (14m)	65.62ft (20m)
Lead Type	Single Feed					Double Feed				
										
	01/02					01 02				

Note: These are the max recommended run lengths based on power supply

For example: It is recommended to use one 80W power supply for a single-fed run of 26.25ft(8m) at 1.07W/ft (7.2W/m), or for a single-fed run of 16.4ft (5m) at 3.66W/ft (12W/m).